

# PRA-CSLW Wallmount LCD call station

[www.boschsecurity.com](http://www.boschsecurity.com)



**BOSCH**

Invented for life



- ▶ Wall mount housing with fixed hand-held microphone and helix cable
- ▶ 4.3" full-color capacitive touch screen
- ▶ Graphical user interface for optimum user guidance and feedback
- ▶ Status and fault indicators for voice alarm purposes
- ▶ Dual OMNEO IP-network connection and redundant Power over Ethernet

The PRA-CSLW is a call station for use in PRAESENSA Public Address and Voice Alarm systems.

It is easy to install and configure, but especially easy to operate because of its touch screen LCD, providing clear user feedback about setting up a call and monitoring its progress, or controlling back ground music.

The call station allows for straightforward positioning because it only requires a connection to an OMNEO IP-network with Power over Ethernet (PoE) for communication and power supply combined.

It can be configured for use as business call station, but also as emergency call station.

The stylish design uses a heavy metal base with a recessed press-to-talk button and provides a hand-held omni-directional microphone to eliminate the proximity effect which creates a boomy sound when a user speaks close to the microphone. It has a built-in loudspeaker for call monitoring and a socket to connect a local background music source. It can be easily installed in a wall mount cabinet or flush mounted on a panel.

The 4.3" high-resolution full-color capacitive touch screen gives the operator optimum control and feedback at all times.

It can be extended with up to four PRA-CSE keypads, each with twelve configurable buttons.

## Functions

### IP-network connection

- Direct connection to the IP-network. One standard CAT5e cable is sufficient for Power over Ethernet, audio and control.
- For dual redundancy of network and power connection, a second CAT5e cable can be connected.
- Integrated network switch with two OMNEO ports allows for loop-through connections to adjacent devices (that provide PoE). Rapid Spanning Tree Protocol (RSTP) is supported to enable recovery from failing network links.

### Business operation


- Full color 4.3" capacitive touch screen with intuitive function menu navigation provides guidance and feedback during the process of live announcements, pre-recorded messages and music control. Successful broadcast of announcements/messages and changes to the background music settings are clearly indicated.
- Press-to-talk switch on hand-held microphone.
- Built-in monitor loudspeaker with volume control.

- Local audio line input (with stereo to mono conversion) for connecting an external audio source. The audio channel will be available on the network and can be played in any loudspeaker zone.
- Connection of up to four PRA-CSE extensions, each with twelve buttons. The buttons can be configured for various functions, but they are especially useful for zone selection, giving a clear overview of accessible zones and the LED indicators for each button show the status of the respective zone (like being selected, occupied or at fault).
- If the call station is not used for a while, it will switch to sleep mode to save energy. It will immediately wake up when the screen, or a button, is touched.

### Emergency operation

- The call station fully complies to the standards for voice alarm applications when the firemen's user interface is configured and at least one PRA-CSE is connected to it.
- All critical alarm functions are accessible via buttons for operators wearing gloves. The 4.3" screen gives feedback on the system status.
- Each of the two RJ45 network connectors accept PoE to power the call station. This provides fail-safe network connection redundancy, as one connection is sufficient for full operation.
- Supervision of all critical elements; the audio path is supervised, as well as the communication to the network.

### Connection and functional diagram

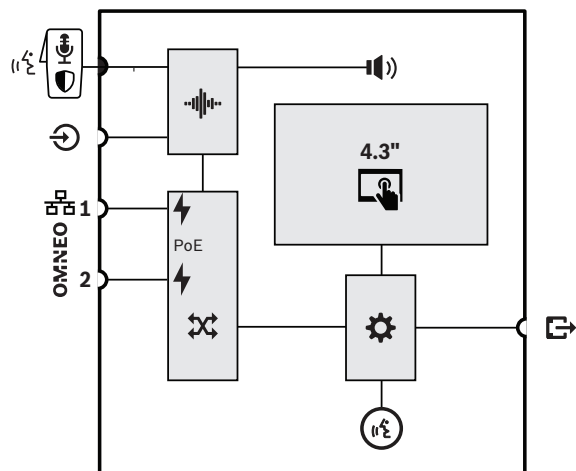

	Fixed hand-held microphone with Press-To-Talk or Start/Stop switch		Audio processing (DSP)
	Internal monitor loudspeaker		Power over Ethernet
	OMNEO network switch		Controller
	Call/Microphone status LED-ring		

### Top-side



### Top-side indicators

	Power on Device in identification mode	Green Green blinking
	Device fault present	Yellow
	Status business call Microphone active Chime/message active	Green Green blinking
	Status emergency call Microphone active Alarm tone/message active	Red Red blinking
	4.3" full-color capacitive touch screen	LCD

### Top-side controls

	Fixed hand-held Press-To-Talk	Microphone Switch
	4.3" full-color capacitive touch screen	LCD

**Bottom-side****Bottom-side indicators**

	100 Mbps network 1-2	Yellow
	1 Gbps network 1-2	Green

**Bottom-side controls**

	Device reset (to factory default)	Button
--	-----------------------------------	--------

**Bottom-side and side interconnections**

	Network port 1-2 (PoE PD)	
	Local source audio line input	
	PRA-CSE interconnection	

**Architects & Engineers specification - PRA-CSLW**

The IP-networked wallmount call station shall be designed exclusively for use with Bosch PRAESENSA systems. The wallmount call station shall provide an interface for control data and multi-channel digital audio over OMNEO using dual Ethernet ports for redundant network connection, supporting RSTP and loop-through cabling. It shall receive Power over Ethernet (PoE) via either one or both network connections. The wallmount call station shall provide a backlit full-color capacitive touch panel LCD as user interface for business and evacuation purposes. The wallmount call station shall accept up to four optional call station extensions, each offering 12 configurable buttons for zone selection and other purposes. It shall provide control and routing of live speech calls, stored messages and music with volume control per zone. The wallmount call station shall have a hand-held

omnidirectional microphone for live calls and a 3.5 mm jack line level input for background music, and provide software-configurable signal processing including sensitivity control, parametric equalization and limiting. The wallmount call station shall be certified for EN 54-16 and ISO 7240-16, marked for CE and be compliant with the RoHS directive. Warranty shall be three years minimum. The wallmount call station shall be a Bosch PRA-CSLW.

**Certifications and approvals****Emergency standard certifications**

Europe	EN 54-16
International	ISO 7240-16

**Environmental directive compliancy**

Safety	EN/IEC/CSA/UL 62368-1
Immunity	EN 55103-2 (E1, E2, E3) EN 50130-4
Emissions	EN 55032 EN 61000-6-3 ICES-003 ANSI C63.4 FCC-47 part 15B class A
Maritime	IEC 60945 (excluding salt mist test) DNV Type approval
Railway	EN 50121-4

**Conformity declarations**

Europe	CE/CPR
USA/Canada	FCC/c-UL/CSA
China	CCC
Korea	KE
Australia	RCM
Taiwan	BSMI
Russian Federation	EAC
Environment	RoHS

**Parts included**

Quantity	Component
1	Wallmount LCD call station
1	Bracket (attached to bottom)
1	Connector cover (attached to bottom)
1	Microphone clip
1	Quick Installation Guide

**Technical specifications****Electrical****Microphone**

Nominal acoustic input level	81 to 96 dBSPL
Maximum acoustic input level	120 dBSPL
Signal to Noise Ratio (SNR)	> 96 dBA
Frequency response	200 Hz to 14 kHz

**Display**

Size	4.3"
Touch screen	Capacitive
Color depth	24-bit
Resolution	480 x 272 px
Brightness	300 cd/m <sup>2</sup>

**Monitor loudspeaker**

Nominal acoustic input level Between 500 Hz and 3 kHz at 1 m	75 dBspl +/-6 dB
Gain control 1 dB steps	Mute, -40 dB to 0 dB
Frequency response	500 Hz to 3 kHz

**Line input**

Signal to Noise Ratio (SNR)	> 96 dBA
Total Harmonic Distortion (THD)	< 0.1%

**Power transfer**

Power over Ethernet (PoE 1-2) Nominal DC output voltage Standard	48 V IEEE 802.3af (mode B)
Power consumption Call station Call station extension	8 W 1 W each
Input voltage tolerance	37 to 57 Vdc

**Supervision**

Supervision Microphone Audio path	Impedance Pilot tone
---	-------------------------

**Supervision**

Press-to-talk switch Controller continuity PoE (1-2)	Impedance Watchdog Voltage
--	----------------------------------

**Network interface**

Ethernet	100BASE-TX, 1000BASE-T
Protocol Redundancy	TCP/IP RSTP
Audio/control protocol Network audio latency Audio data encryption Control data security	OMNEO 1 ms AES128 TLS

Ports	2
-------	---

**Environmental****Climatic conditions**

Temperature Operating	-5 to +50°C (23 to 122°F)
Storage and transport	-30 to +70°C (-22 to 158°F)
Humidity (non-condensing)	5% to 95%
Air pressure (operating)	560 to 1070 hPa
Altitude (operating)	-500 to +5000 m (-1640 to 16404 ft)
Ingress protection	IP30

**Mechanical****Enclosure**

Dimensions (WxHxD)	130 x 62 x 189 mm (5.12 x 2.44 x 7.44 in)
Base Material Color	Zamak RAL9017
Panel Material Color	Plastic RAL9017 RAL9022HR
Weight	1.0 kg (2.21 lb)

**Ordering information****PRA-CSLW Wallmount LCD call station**

Network-connected, PoE powered, touch screen call station with hand-held microphone.

Order number **PRA-CSLW**

**Represented by:**

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
emea.securitysystems@bosch.com  
emea.boschsecurity.com

**Germany:**  
Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Ring 5  
85630 Grasbrunn  
Germany  
www.boschsecurity.com

**North America:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
onlinehelp@us.bosch.com  
www.boschsecurity.us

**Asia-Pacific:**  
Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia